Distribution Unit with IEC Appliance Connector C14 and Appliance Plug F shuttered, 70°C

F C14

70° C 70° C

Description

- Stand alone module
- 2 Functions:
  of 2 outlets, Inlet, Pin temperature 70 °C, Protection class I, shuttered

Weblinks

Approvals: http://www.schurter.com/approvals
RoHS: http://www.schurter.com/rohs

Technical Data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 2.5 kVAC between L-N > 2.5 kVAC between L/N-PE (3 sec/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	C14 acc. to IEC/EN 60320-1, F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10 A, Protection class I

Dimensions

Length 72.6 mm

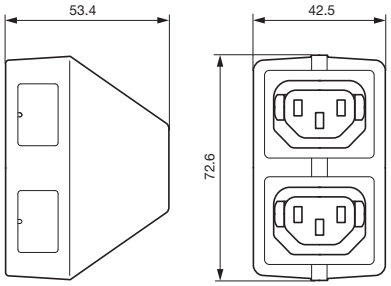



Shutter operation:
shutters opened by plug insertion



Shutter operation:
shutters closed when plug is removed

Variants

Type	Order Number
4741	4741.0000

Packaging unit

50 Pcs